

DRAGA 3000 JET SUCTION DREDGER




INNOVATIVE – SUSTAINABLE – ROBUST

—— **Electric-driven dredge pump:** lowest cost per cubic meter. No emissions and minimal noise pollution.

—— In-house **iPump®** line: developed through sixty years of experience in sand and gravel extraction. Wear-resistant for increased lifespan, optimal suction characteristics, adaptable for a wide range of tasks.

—— In-house **iDredge® control and automation system:** ensuring increased efficiency and reduced power consumption. Optional: remote-controlled dredge systems and data collection for automated performance analyses.

—— **Modular construction** for low-cost transportation worldwide and inland delivery to remote locations. Relocation facilitated through the iPlug-and-Dredge Concept. The modular design ensures industry-leading delivery times and continuous **availability of spare parts.**

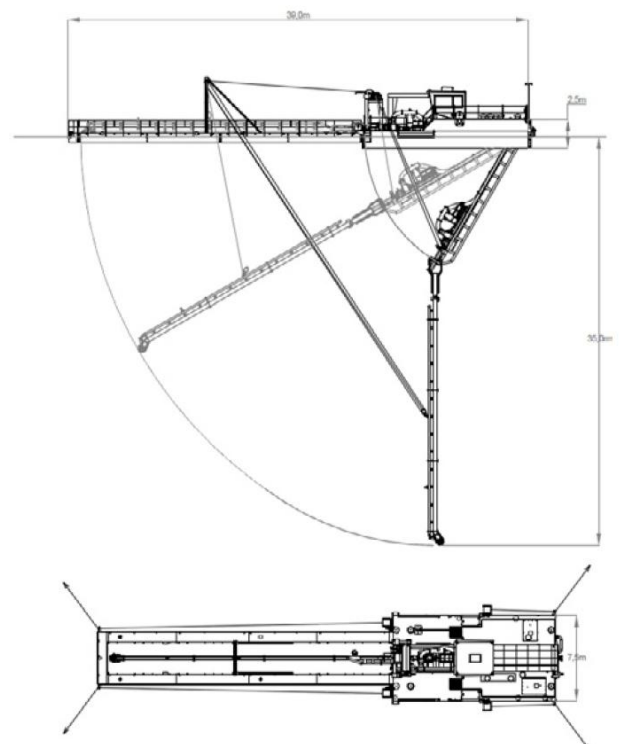

DRAGA 3000 JET SUCTION DREDGER

TECHNICAL SPECIFICATIONS

FEATURES

- Transportable by Road
- Efficient Electric Drive System
- Small Environmental Footprint
- Low Noise & Vibration Level
- One-man Operation

DREDGING FEATURES

Max. Dredging Depth:	35	[m]
Nominal Mixture Flow:	900 – 2400	[m ³ /h]
Available Suction Diameter:	300 – 400	[mm]
Available Discharge Diameter:	250 – 400	[mm]
Available Dredge Pump Sizes:	250 / 300 / 350 / 400	[mm]
Min. Spherical Pump Passage:	160	[mm]

DREDGE PUMP DRIVE

Power Source:	Electric feed cable
System:	Submersible Motor
Available Dredge Pump Power:	315 / 400 / 500 [kW]

JET PUMP

Jet Pump Flow:	300 / 400	[m ³ /h]
Jet Pump Pressure:	8	[bar]
No. Jet Nozzles:	8	[pcs]

PRINCIPAL DIMENSIONS

Length o.a. with raised ladder:	39	[m]
Length over pontoons:	39	[m]
Width:	7.5	[m]
Depth:	2.5 / 1.5	[m]
Draught:	0.7	[m]
Main Pontoons LxWxH:	18 x 2.5 x 2.5	[m]
Total dry weight:	72	[ton]
Air draught:	5.1	[m]

ELECTRIC INSTALLATION

Primary Voltage:	6 / 10	[kV]
Secondary Voltage (3-Phase):	400	[Vac]
Dredge Pump Power Source:	VFD	
Jet Pump Power Source:	Soft starter / VFD	
Mooring Winches:	DOL starter	

DECK INSTALLATION

Ladder Hoisting Winch (Electric):	60	[kN]
Suction Tube Hoisting Winch (Electric):	40	[kN]
Mooring Winches (Electric):	30	[kN]
Mooring Winch Wire Capacity:	200	[m]

DECK CRANE

Lifting Capacity:	15	[kN]
Outreach:	2.2	[m]

TOOLS

- Special tools are supplied for maintenance of dredge pump

INSTRUMENTATION

- **iDredge®** Dredger Control System
- Dredging Depth indication
- Vacuum and Pressure Indication of Dredge Dump


OPTIONAL EQUIPMENT

- DGPS Dredge Mining Control System
- Production Measurement
- Discharge Velocity Measurement
- Additional Hydraulic Excavation Head
- Wedge piece for small min. Dredging depths
- Floating discharge pipeline
- Floating high voltage supply cable
- Remote dredge monitoring
- Gland pump

DRAGA 3000 JET SUCTION DREDGER



DRAGA 3000 JET SUCTION DREDGER

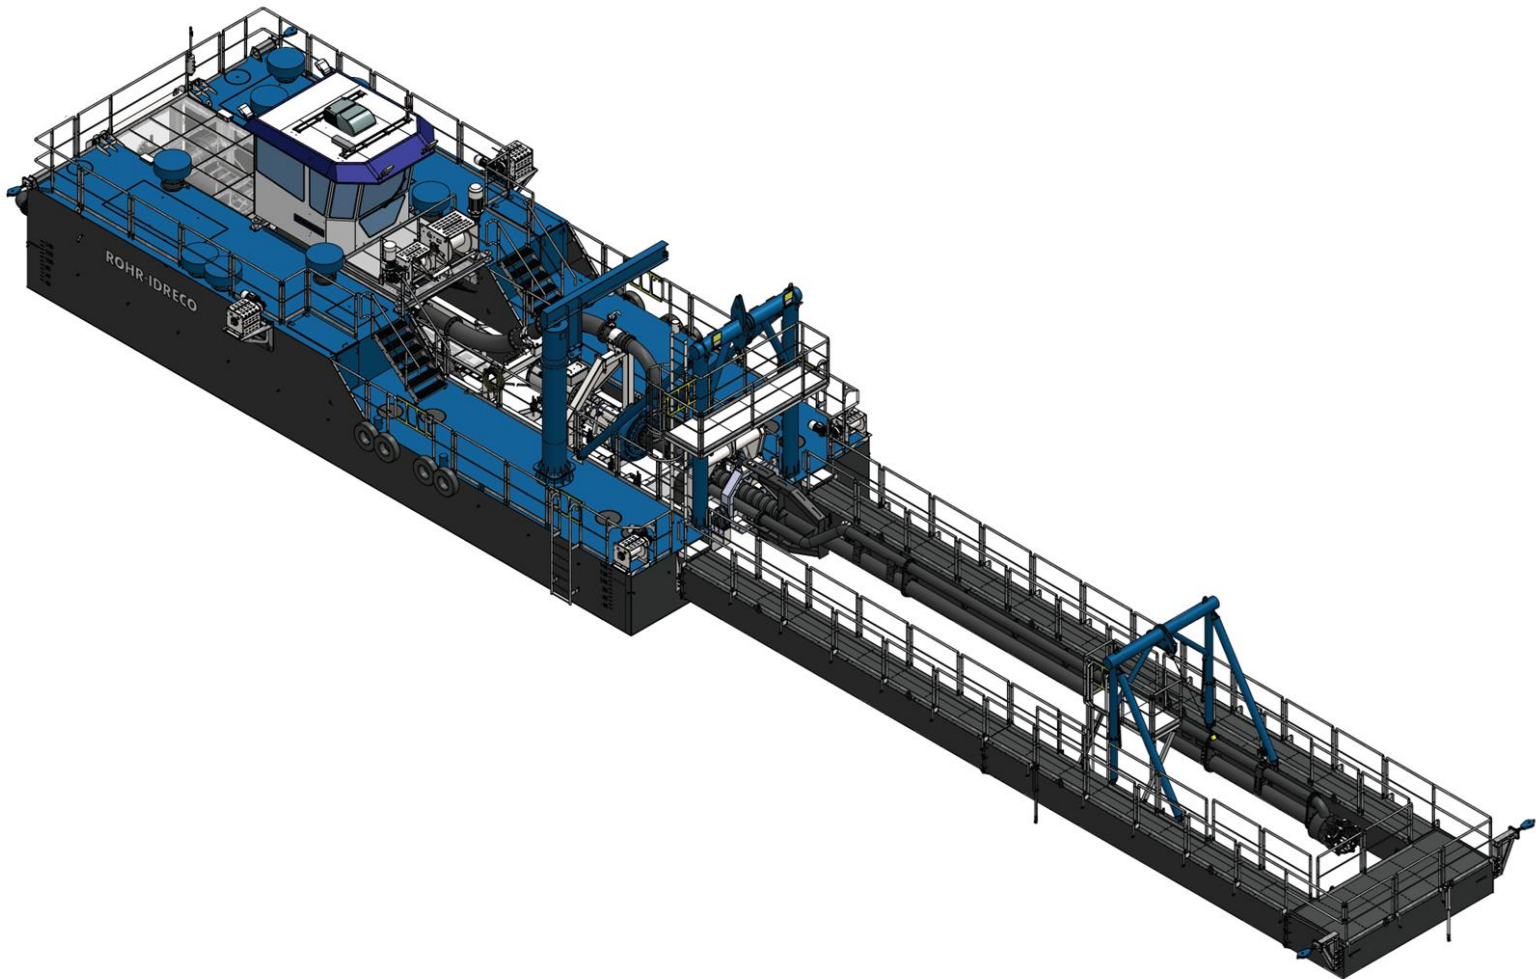

ROHR-IDRECO



ROHR-IDRECO

Innovatieweg 40-07,
7007 CD Doetinchem,
The Netherlands

+31 314 66 70 01
sales@rohr-idreco.com
www.rohr-idreco.com